


# Lijian Composite Materials Co.,LTD.

www.fiberglass-mat.com-Sale@fiberglass-mat.com-Tel :+86-13776546919-Fax:+86-25-68923190

## Carbon Fiber Board

- High-temperature resistance
- Rub resistance
- Conduction,heat-conductive
- Corrosion resistance
- Aeolotropism ,soft,can be used to weave
- Along the fiber axis, has high tensile strength and Young's modulus

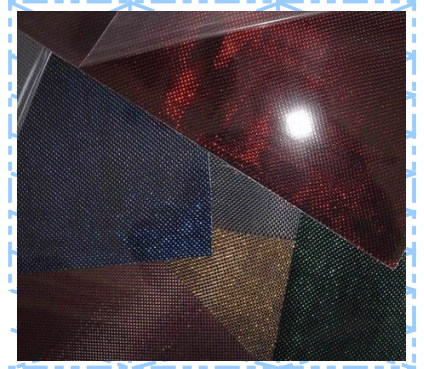

Serials-1

- Seraisl-1:Unidirectional Carbon Board

- Technical Datas for Serials-1

Porduct Code	Reinforce ment Yarn	Texture	Tensile Strength	Tensile Modulus	Elongation	Thickness	Width
			MPa	GPa	%	mm	mm
XW-UB-12-50	12k	Unidirection	≥2800	≥165	1.7	1.2	50
XW-UB-12-60	12k	Unidirection	≥2800	≥165	1.7	1.2	60
XW-UB-12-80	12k	Unidirection	≥2800	≥165	1.7	1.2	80
XW-UB-12-100	12k	Unidirection	≥2800	≥165	1.7	1.2	100
XW-UB-13-50	13k	Unidirection	≥2800	≥165	1.7	1.2	50
XW-UB-13-60	13k	Unidirection	≥2800	≥165	1.7	1.2	60
XW-UB-13-80	13k	Unidirection	≥2800	≥165	1.7	1.2	80
XW-UB-13-100	13k	Unidirection	≥2800	≥165	1.7	1.2	100
XW-UB-14-50	14k	Unidirection	≥2800	≥165	1.7	1.2	50
XW-UB-14-60	14k	Unidirection	≥2800	≥165	1.7	1.2	60
XW-UB-14-80	14k	Unidirection	≥2800	≥165	1.7	1.2	80
XW-UB-14-100	14k	Unidirection	≥2800	≥165	1.7	1.2	100

Nanjing Lijian Composite Materials Co.,LTD.

Tel:0086-25-68923190 0086-13776546919

Fax:0086-25-68923190

Web:www.fiberglass-mat.com

E-mail:Sales@fiberglass-mat.com