


Lijian Composite Materials Co.,LTD.

www.fiberglass-mat.com-Sale@fiberglass-mat.com-Tel :+86-13776546919-Fax:+86-25-68923190

Finishmat



- Hand lay-up process
- Filament winding process
- Pultrusion process
- RTM process
- SMC process
- MMD process

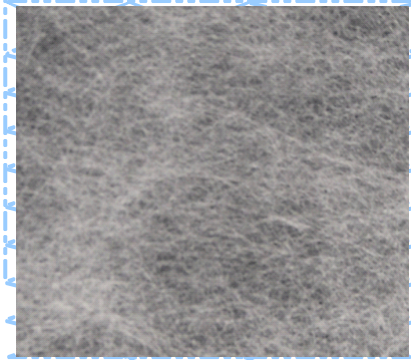

Technical Datas

Codes	Density g/m ²	Thickness mm	Width mm	Tensile Strength	Extensibility	Shrinkage	
				N/50mm MDXCD	% MDXCD	% MDXCD	180 °C
PPFRP3635B	35	0.25	<2200	80X62	48X46	<3X3.5	Free Shrinkage
PPFRP3545B	45	0.25	<2200	120X90	45X44	<3X3.5	
PPFRP6030B	30	0.18	<2200	80X38	30X30	<2X2.5	

Codes	Recommended Process					
	Hand Lay-up	Filament Winding	Pultrusion	RTM	SMC	MMD
PPFRP3635B			√	√	√	
PPFRP3545B			√	√	√	
PPFRP6030B	√	√	√		√	√

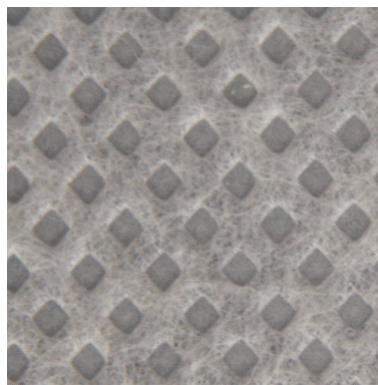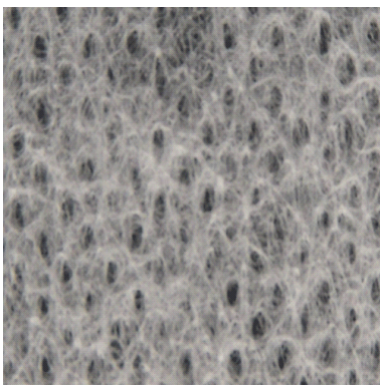

Nanjing Lijian Composite Materials Co.,LTD.
 Tel:0086-25-68923190 0086-13776546919
 Fax:0086-25-68923190
 Web:www.fiberglass-mat.com
 E-mail:Sales@fiberglass-mat.com