


Lijian Composite Materials Co.,LTD.

www.fiberglass-mat.com-Sale@fiberglass-mat.com-Tel :+86-13776546919-Fax:+86-25-68923190

Fiberglass Tissue For Pipeline Protection

- Pipeline Corrosion Protection
- Underground pipelines corrosion resistance
- Gas or oil pipelines protection

Serials-1	PW-50/W	PW-60/W	PW-90/W
Serials-2	PW-50/B	PW-60/B	PW-90/B
Serials-3	PW-50/Y	PW-60/Y	PW-90/Y

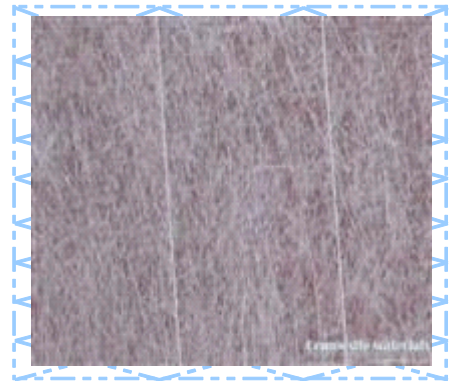

Serials-1

- Serials-1:We insert 68Tex fiber glass yarn in longitudinal to increase tensile strength.The fiberglass tissue is 18mm length and 13μm Dia. chop glass fiber by wet process.Serials-1 is white color ones.

Codes	Unit	PW-50/W	PWM-	PW-90/W
Density	g/m ²	50	60	90
ReinforcementYarn	Tex	68		
Yarn Space	mm	15/30		
LOI	%	16-20		
Tensile Strength MDXC	N/50mm	180 X70	200 X80	260 X130
Thickness	mm	0.4	0.5	0.65
Moisture content	%	<0.5		
Air Permeability	m ³ /m ² *	5.5-18.9		
Roll Size WXL	m	1X3000	1X2500	1X1500



Serials-2

- Serials-2:The Fiberglass tissue is processed based on serials-1 and colored black.
- Serials-3:The Fiberglass tissue is processed based on serials-1 and colored yellow.

- Packages
- Method One
Big rolls size,packed with reinforced plastic film
Core Dia.152.4mm
Roll Dia.≤1209mm
Loading(40'container)40 rolls on pallets
- Method Two
Standard rolls size,packed with reinforced plastic film
Core Dia.152.4mm
Roll Dia.≤1170mm
Loading(40'container)44 rolls without pallets
- Method Three
Small rolls size,packed with reinforced plastic film
Core Dia.76.2mm
Roll Dia.≤760mm
Loading(40'high container)114 rolls without pallets



Serials-3

Important Notice

Loading(uploading)-Please do not drag and drop
Please place in dry and shade
Please do not open package before use

Contact

Nanjing Lijian Composite Materials Co.,LTD.
Tel:0086-25-68923190 0086-13776546919
Fax:0086-25-68923190
Web:www.fiberglass-mat.com
E-mail:Sales@fiberglass-mat.com