


Lijian Composite Materials Co.,LTD.

www.fiberglass-mat.com-Sale@fiberglass-mat.com-Tel :+86-13776546919-Fax:+86-25-68923190

Polyester Nonwoven Fabrics

- APP or SBS modified bitumen membrane
- Asphalt roofing shingles
- Asphalt truway
- Fiber Type:PET (Polyester) or PP(Spunbonded polyester)
- Width:1.01-1.02M
- Density:100-350G/M2
- Color:White
- Seraisl-1:Polyester nonwoven fabrics
- Seraisl-2:Spunbonded polyester nonwoven fabrics

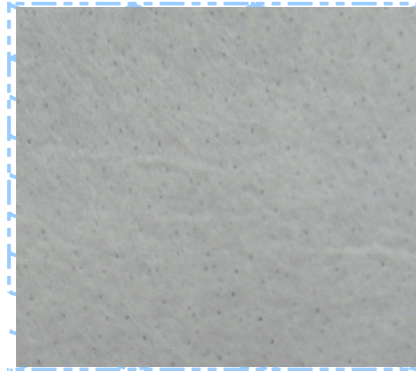

Serials-2

Technical Datas for Serials-1

Codes	Density	Minimum Tensile strength (N/50mm)		Minimum Extensibility		Maximum Shrinkage	
		MD	CD	MD	CD	MD	CD
	g/ m ²	N/ 5cm		%		%	
PETM-140W	140	320	260	25	30	2	2
PETM-160W	160	350	300	25	30	2	2
PETM-180W	180	400	380	30	30	2	2
PETM-200W	200	450	400	30	30	2	2
PETM-220W	220	500	450	30	30	2	2
PETM-250W	250	550	500	30	30	2	2

Technical Datas for Serials-2

Codes	Density	Thickness	Minimum Tensile strength (N/50mm)		Minimum Extensibility		Maximum Shrinkage	
			MD	CD	MD	CD	MD	CD
	g/ m ²	mm	N/ 5cm		%		%	
PPM-100	100	0.92	320	220	30	30	4.5	4.5
PPM-120	120	1.1	380	280	30	30	2.0	2.0
PPM-140	140	1.22	460	360	30	30	2.0	2.0
PPM-150	150	1.28	485	380	30	30	2.0	2.0
PPM-160	160	1.34	520	420	30	30	2.0	2.0
PPM-180	180	1.44	580	480	32	32	1.5	1.5
PPM-200	200	1.52	660	560	35	35	1.5	1.5
PPM-220	220	1.6	710	600	35	35	1.0	1.0
PPM-250	250	1.72	840	700	35	35	1.0	1.0

Nanjing Lijian Composite Materials Co.,LTD.

Tel:0086-25-68923190 0086-13776546919

Fax:0086-25-68923190

Web:www.fiberglass-mat.com

E-mail:Sales@fiberglass-mat.com