


# Lijian Composite Materials Co.,LTD.

www.fiberglass-mat.com-Sale@fiberglass-mat.com-Tel :+86-13776546919-Fax:+86-25-68923190

## ePTFE Membrane Filter

- ePTFE Membrane Filter
- ePTFE Glass Fiber Cloth
- PTFE Glass Fiber Cloth
- Texturized Glass Fiber Filter Cloth

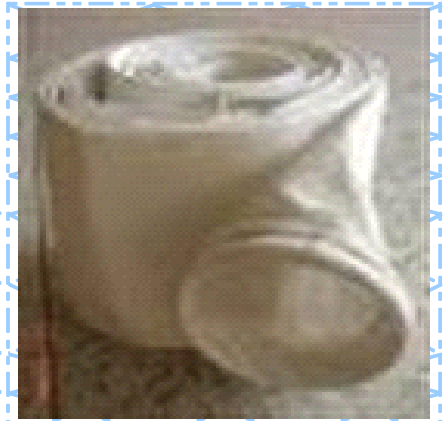

Serials-1	TFFC400E/EPTFE	TFFC750E/EP TFE	TFFC750C/EPTFE	TFFC750C/EP TFE
Serials-2	EENWNP50 O/EPTFE			
Serials-3	TFFC450E	TFFC550E	TFFC800E	TFFC900E
Serials-4	TFFC450C	TFFC550C	TFFC850C	TFFC900C

### Serials-1:ePTFE Membrane Filter

Test Items	Units	Textured Fiber Glass ePTFE Membrane Filter		
		TFFC400E/EP TFE	TFFC750E/EPTFE	TFFC750C/EPTFE
Mass	Gr/M2	400	750	750
Break Strength	N/25MM	>1300x1100	>2100x2100	>1600x1800
Air Permeability	CM/S	2-6	2-6	2-6
Suitable Cleaning Form		High Velocity Reverse Air Filter	Low Pressure Pulse Filter	
Service Temperature	°C	<260	<260	<260
Recommended Air Flow	M/Min	<0.8	<1.2	<1.0

### Serials-2:ePTFE Glass Fiber Cloth

Test Items	Units	Composite Fiber Needle Mat ePTFE Membrane Filter	
		EENWNP500/EPTFE	
Mass	Gr/M2	500	
Break Strength	N/50MM	>1000x1200	
Elongation	%	<35x45	
Air Permeability	CM/S	2-6	
Suitable Cleaning Form		Pulse Filter	
Service Temperature	°C	<130	
Recommended Air Flow	M/Min	<1.5	

### Serials-3:PTFE Glass Fiber Cloth

Codes	Fiber Type	Mass	Breaking strength(N/25mm)		Permeability	Service Temperature	Recommended Air Flow
		g/m <sup>2</sup>	MD	CD			
TFFC450E	E-GLASS	450	>1750	>1000	20-55	<280	<0.5
TFFC550E	E-GLASS	550	>2200	>1500	15-35	<280	<0.5
TFFC800E	E-GLASS	800	>2400	>2100	10-30	<280	<0.7
TFFC900E	E-GLASS	900	>2800	>2100	5-25	<280	<0.8

# Lijian Composite Materials Co.,LTD.

www.fiberglass-mat.com-Sale@fiberglass-mat.com-Tel :+86-13776546919-Fax:+86-25-68923190

- Serials-3:PTFE Glass Fiber Cloth

Codes	Fiber Type	Mass g/m <sup>2</sup>	Breaking strength(N/25mm)		Permeability cm/s	Service Temperature °C	Recommended Air Flow m/min
			MD	CD			
TFFC450C	C-GLASS	450	>1700	>900	20-40	<260	<0.5
TFFC550C	C-GLASS	550	>1700	>1200	20-40	<260	<0.5
TFFC850C	C-GLASS	850	>2250	>1400	15-35	<260	<0.8
TFFC900C	C-GLASS	900	>2500	>1500	15-35	<260	<0.8

### Important Notice

Loading(uploading)-Please do not drag and drop

Please place in dry and shade

Please do not open package before use

Nanjing Lijian Composite Materials Co.,LTD.

Tel:0086-25-68923190 0086-13776546919

Fax:0086-25-68923190

Web:www.fiberglass-mat.com

E-mail:Sales@fiberglass-mat.com